



Banderola luminosa redonda

Guía de tamaños

| Tamaño | Medidas (mm) | | | Peso (kg) |
|--------|--------------|------------|------------------|-----------|
| | Diámetro | Separación | Longitud de pata | |
| 50 | 500 | 200 | 170 | 3,10 |
| 60 | 600 | 250 | 180 | 3,90 |
| 75 | 750 | 250 | 170 | 5,10 |
| 80 | 800 | 260 | 170 | 5,90 |
| 100 | 1000 | 300 | 180 | 7,48 |

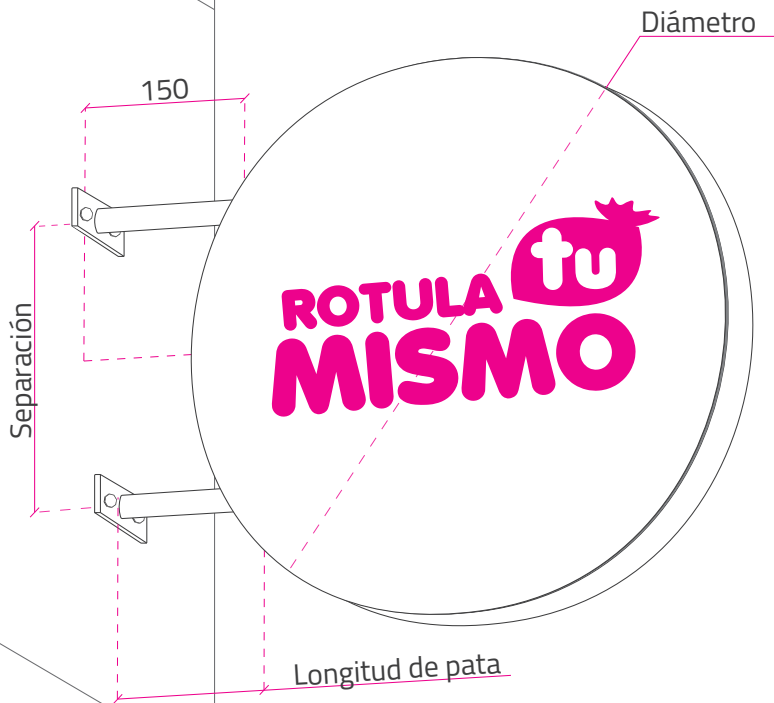

Especificaciones técnicas

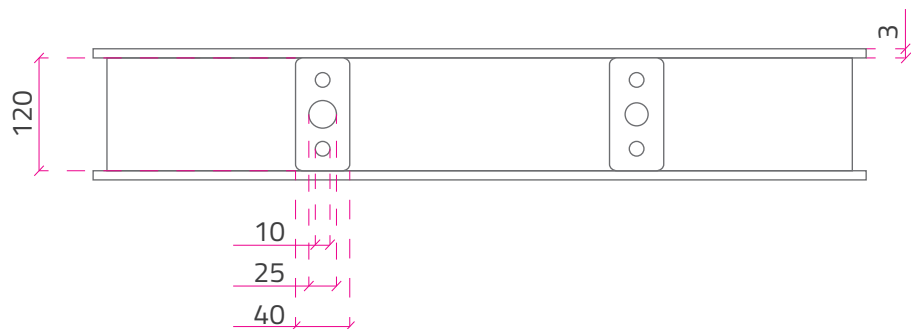

Cotas en mm

Banderola luminosa redonda


Ficha técnica

Iluminación

| Tamaño (cm) | Iluminación | | |
|-------------|-------------|------------------|----------------------------|
| | Consumo (W) | F. luminoso (lm) | Eficiencia luminosa (lm/W) |
| 50 | 15 | 1210 | 80,67 |
| 60 | 16,5 | 1331 | 80,67 |
| 75 | 21 | 1694 | 1694 |
| 80 | 22,5 | 1815 | 80,67 |
| 100 | 37,5 | 3025 | 80,67 |

| Tamaño (cm) | Iluminación | | | | | |
|-------------|------------------|----|----|---------------------------------|----|----|
| | Iluminancia (lx) | | | Luminancia (cd/m ²) | | |
| | 1m | 2m | 3m | 1m | 2m | 3m |
| 50 | 108 | 27 | 12 | 108 | 27 | 12 |
| 60 | 119 | 30 | 13 | 119 | 30 | 13 |
| 75 | 151 | 38 | 17 | 151 | 38 | 17 |
| 80 | 162 | 40 | 18 | 162 | 40 | 18 |
| 100 | 270 | 67 | 30 | 270 | 67 | 30 |

| Especificaciones lumínicas | | | | | | | CE RoHS |
|----------------------------|-------------|-------------|----------|----|--------------|------------------|---------|
| Color | Voltaje (V) | Consumo (W) | Ángulo | IP | Medidas (mm) | F. luminoso (lm) | |
| Blanco 6500k | DC 12V | 1,5 | 10 x 65° | 67 | 44 x 25 x 12 | 121 | |

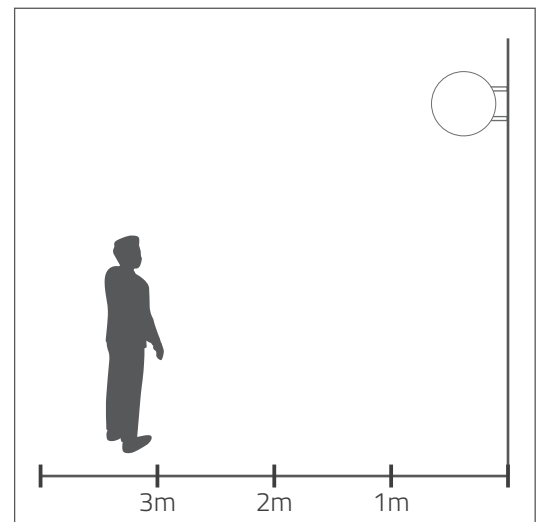

Supuesto de medición

